



8 Cable glands and accessories



2 Plugs

2 Exd brass nickel plated - NPT

Plugs are used to safely seal unused openings in enclosures and apparatuses.

These plugs are screwed in and fastened on the outside.

Specifications


Marking	All plugs are marked with a certificate number and size.
Material	brass nickel plated
Thread	NPT according to ANSI B1.20.1
Protection	IP68
Ambiant temperature	-60°C - +130°C
Guideline	ATEX
Manufacturer	Bimed

II 2 G Ex db IIC Gb

II 2 D Ex tb IIIC Db

Zone 0	✗	Zone 20	✗
Zone 1	✓	Zone 21	✓
Zone 2	✓	Zone 22	✓

CESI13ATEX066X




On request

- stainless steel
- bigger types up to 4"NPT
- other approvals

Ordering data

Code	Thread
PNDN1	1/2"NPT
PNDN2	3/4"NPT
PNDN3	1"NPT
PNDN4	1 1/4"NPT
PNDN5	1 1/2"NPT
PNDN6	2"NPT

Dimensional sketches

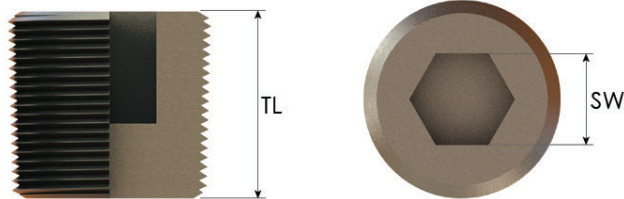

Product code	Dimensions	
	TL	SW
PNDN1	20	10
PNDN2	20	10
PNDN3	25	14
PNDN4	25	14
PNDN5	25	14
PNDN6	25	14

